


DO NOT USE THIS DIGITAL COLOR CHART FOR COLOR MATCHING.

This digital color chart is intended to be viewed on computer monitors to show a wide range of colors available. Colors will vary depending on your computer monitor and monitor settings. Please ask for a physical color chart to view colors, and a metal sample for color matching purposes.

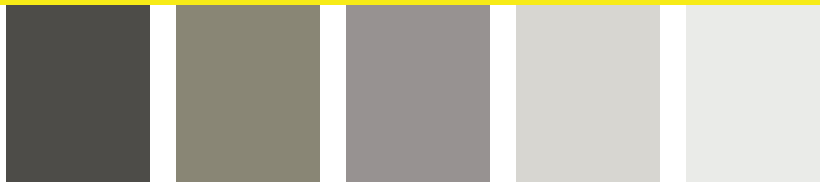

Charcoal
THRIFTY | PRIME

Desert
PRIME

Gray
THRIFTY | PRIME

Polar
THRIFTY | PRIME

Brilliant
PRIME



Commercial

Color Selection Tool

M-Loc™
R-Loc™



*Contact your sales person for accurate pricing. † Color variation between orders is normal and not cause for rejection. ‡ Weathering and appearance variation, including color, sheen, and spangle, is common in non-painted materials and is not a cause for rejection. For consistent appearance, choose a paint-finished product.

Colors on this chart are close representations of actual metal color, limited by printing and viewing conditions. Color matching is optimized for outdoor viewing.

E CHRT_COML_210101

SHERWIN-WILLIAMS
Coil Coatings



Check our website to verify which colors meet ENERGY STAR® requirements for steep slope roofs.

Fern
PRIME



Hunter
THRIFTY | PRIME



Colony
PRIME




Crimson
PRIME



Rustic
THRIFTY | PRIME



Burgundy
PRIME



Gallery
PRIME



Hawaiian
PRIME



Light Stone
THRIFTY | PRIME



Tan
THRIFTY | PRIME



Brown
THRIFTY | PRIME



Burnished Slate
PRIME



PREMIUM COLOR


Fluropon® 70% PVDF

Copper Metallic*†
PRIME



Clear acrylic coating

Galvalume®‡
PRIME



Best protection and a lifetime warranty.

Available on our Prime panels, this guarantees you the best protection along with a lifetime paint warranty. It offers the perfect balance of fade protection, rust resistance, and dent resistance.



OUR BEST SELLER!

PRIME

FADE PROTECTION

Paint Warranty
Paint Thickness
Fade Warranty
Fade Protection

LIFETIME
THICKER 1.0 mil
30-YEAR
✓✓

RUST BLOCKING

Advanced Rust Blocking
Perforation Warranty
Substrate Thickness

✓
20-YEAR
1.60 mil

DENT RESISTANCE

Advanced Dent Resistance
Steel Thickness
Steel Gauge

✓✓
THICK
26 ga.

INSTALLATION

Purlin Bearing Leg

✓